


C250
250kN
EN 1433

GAP - COMPETITIVE 100mm wide

GALVANISED HEAVY DUTY TOP FRAME SYSTEM
Heavy duty - Load class C250 = 25 tonnes

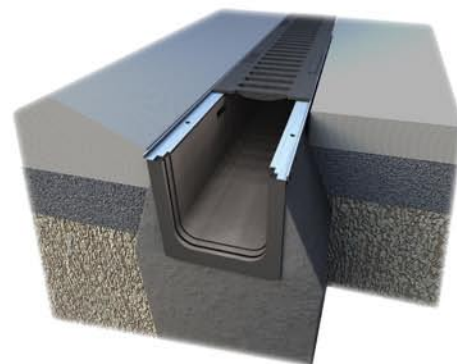

100 x 151 i
154 x 185 e
(mm)



151mm Deep (internal) GAP HDPE drainage channel

i = internal
e = external
1000mm long
Channel weight = 2.5kg

100 x 74 i
154 x 108 e
(mm)



74mm deep (internal) GAP HDPE drainage channel

i = internal
e = external
1000mm long
Channel weight = 1.8kg



- Easy to maintain.
- Quick and easy to install.
- Unobstructed channel cross section.
- Tongue and groove connection for a professional installation.
- HD-PE grate / channel can be cut with general purpose saw.
- Light but incredibly tough means no problems in transportation or storage and of course no breakages.
- Temperature tolerant HD-PE maintains the same characteristics of strength and elasticity from -50°C to +100°C.
- For use in car parks and heavy duty areas.



Product code DESCRIPTION

G10-151	151mm deep 1000mm long HDPE channel
G10-74	74mm deep 1000mm long HDPE channel
G10-3DG	C250 duty 500mm long ductile iron slotted grating
G10-3DGM	C250 duty 500mm long ductile iron mesh grating

Accessories

G10-SUMP	500mm long x 427mm high HDPE sump box
END10-151	151mm deep end cap
END10-74	74mm deep end cap
OUT10-151	151mm deep end cap outlet
OUT10-74	74mm deep end cap outlet
E10D-TIE	Ductile iron tie rods and screws for locking

