

BSI KITEMARKED - BS EN124 C250

75mm deep - Heavy Duty Ductile Iron Single Seal Solid Top Access Covers
Usage : Group 3-slow moving heavy traffic



BS EN124

KM 45942

EN 124
C 250



FEATURES

Manufactured to **BS EN124 class C250**.

Kitemarked for third party assurance of quality.

Full single seal gives airtight seal when packed with grease.

Suitable for slow moving heavy traffic.

25 tonne safe test load.

Works safely tested to 27.5 tonnes = +10%.

Ductile iron for improved weight to strength ratio.

Black coated finish.

OPTIONAL EXTRAS

Locking - Standard Bolts

Locking - Approved High security bolts/keys

Badging i.e. FW, SW, CATV etc

Sealing plates


Pressure plates

Ventilation

Safety grids

Lifting keys - key ref: Hkey

Long handled lifting keys - key ref: LHkey

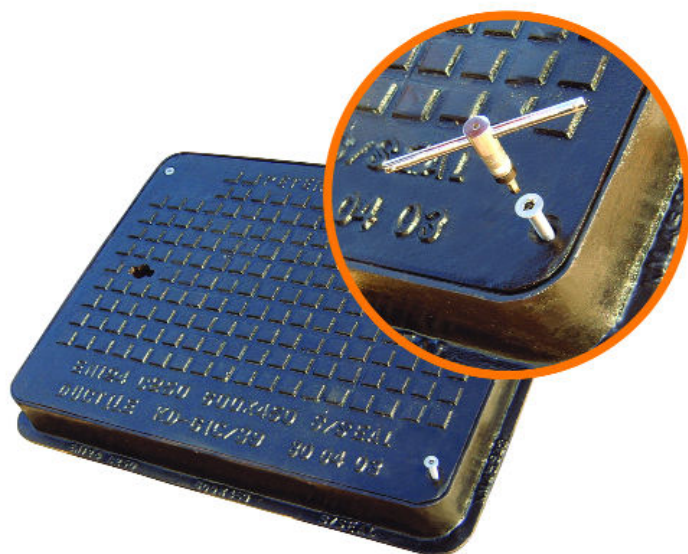

Approved High Security Locking

PRODUCT CODE	CLEAR OPENING	FRAME DEPTH	OVERALL FRAME	MASS apx Kg's
*KD59C	450x300mm	50mm	540x390mm	30
KD60C	450x450mm	75mm	550x550mm	49
KD61C	600x450mm	75mm	700x550mm	60
KD62C	600x600mm	75mm	700x700mm	75
KD63C	750x600mm	75mm	850x750mm	89
KD64C	750x750mm	75mm	850x850mm	119
KD65C	900x600mm	75mm	1000x750mm	119
KD66C	900x900mm	75mm	1000x1000mm	160

*Embossed Traffic Signals as standard



FM 37799
BS EN ISO
9001:2000

Copyright 2007 Peter Savage Ltd. All rights reserved.

NUNEATON : 024 7664 1777
WAKEFIELD : 01924 258 381

: 024 7637 5250
: 01924 258 382



enquiries@peter-savage.co.uk