

BSI KITEMARKED - BS EN124 C250



Heavy Duty Ductile Iron Hinged & Double Triangular Gully Gratings
Usage : Group 3-for slow moving heavy traffic & areas not exceeding 500mm from the kerbside



BS EN124

KM 45942

EN 124
C 250

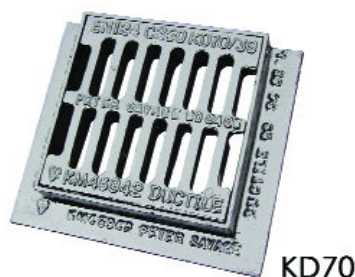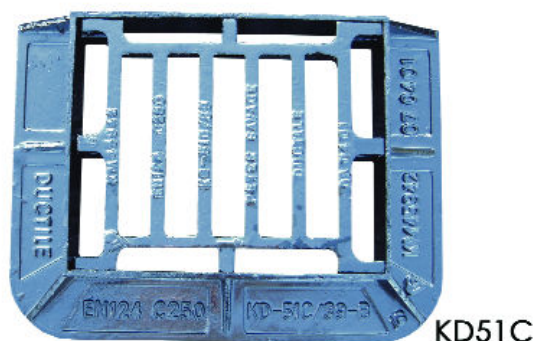

FEATURES

Manufactured to **BS EN124 class C250**.

Kitemarked for third party assurance of quality.
Suitable for carriageway applications not exceeding
500mm from the kerbside.
25 tonne safe test load.

Works safety tested to 27.5 tonnes = +10%.

Yard gullies with flat top & dished types available.
Non-rock design for increased stability & silent operation.
Ductile iron for improved weight to strength ratio.
Black coated finish.

OPTIONS (See pages 27 & 28 for full details)

Locking - standard bolts

Locking - approved high security bolts / keys

PRODUCT CODE	OVER GRATE	FRAME DEPTH	OVERALL FRAME	MASS apx Kg's	WATERWAY apx cm ²	SUITS GULLY	HA102 REF
Captive hinged design							
KD51C	380x310mm	75mm	472x370mm	22	764	375mm	S
KD51CB	380x310mm	75mm	555x410mm	22	764	375mm	S
KD51CPL	380x310mm	75mm	555x410mm	28	543	375mm	T
*KD50CN	420x420mm	75mm	520x510mm	29	1100	450mm	R
Non rock double triangular							
KD41C	445x445mm	75mm	535x500mm	38	950	450mm	R
Proprietary yard gully gratings							TYPE
KD70	225x225mm	75mm	285x265mm	9	228	228mm	Flat top
KD71	225x225mm	75mm	285x265mm	9	228	228mm	Dished
KD72	300x300mm	75mm	360x340mm	16	450	304mm	Flat top
KD73	300x300mm	75mm	360x340mm	16	450	304mm	Dished

*KD51CPL has a pedestrianised grating & is locked as standard



FM 37799
BS EN ISO
9001: 2000

Copyright 2007 Peter Savage Ltd. All rights reserved.

NUNEATON : 024 7664 1777
WAKEFIELD : 01924 258 381

: 024 7637 5250
: 01924 258 382



: iron@peter-savage.co.uk
: wakefield@peter-savage.co.uk