



FM 37799


C250

# PETER SAVAGE LIMITED


Heavy Duty Ductile Iron Hinged Paving/Channel Gratings & Chute Connector



D58-2



D58-1

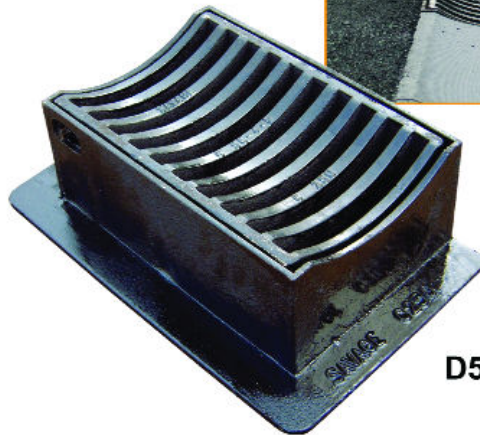

D58-4



## FEATURES

Manufactured to **class C250** where appropriate.  
 Suitable for areas with slow moving heavy traffic.  
 Captive hinged design (except D46-1).  
 25 tonne safe test load.  
 Ductile iron for improved weight to strength ratio.  
 Black coated finish.



D46-1

PRODUCT CODE	OVER GRATE	FRAME DEPTH	OVER TOP OF FRAME	OVER BASE	DEPTH OF DISH	No of Flanges
--------------	------------	-------------	-------------------	-----------	---------------	---------------

### Savage Blogully

D58-2	340x170mm	145mm	400x200mm	450x270mm	15mm	3
D58-3	340x170mm	145mm	400x200mm	450x320mm	15mm	4
D58-1	170x170mm	125mm	200x200mm	300x250mm	15mm	3

Dished to suit proprietary block paving drainage channel systems with a block size of 200x200mm (O/Top)

### Savage Congully

D58-4	360x240mm	145mm	375x250mm	480x305mm	30mm	3
D58-5	360x240mm	145mm	375x250mm	480x355mm	30mm	4

Dished to suit proprietary 225 x 125mm (10"x5") concrete channel systems

### Savage Gully Chute Connector

	Top catchment	Spigot	Overall	Bottom catchment	Catchment depth	Overall depth
D46-1	420x330mm	150mm	530x415mm	170x160mm	175mm	185mm

Gully chute connector for sub-kerb gully grating installation. This item does not require a loading category.  
 Suitable for : all KD41D, KD50D & KD115 patterns, KD52D, KD50CN, KD41C & DSUB.

NUNEATON : 024 7664 1777  
 WAKEFIELD : 01924 258 381

: 024 7637 5250  
 : 01924 258 382



[enquiries@peter-savage.co.uk](mailto:enquiries@peter-savage.co.uk)



FM 37799  
 BS EN ISO  
 9001:2000