

# 2500 series - single unit

## PETER SAVAGE 2500 SERIES

Fabricated steel rolled hollow section drainage gratings and frames


### Product & load rating:

**PS2501** - F.A.C.T.A Class AA 5 tonne G.L.V.W  
**PS2502** - F.A.C.T.A Class AAA 10 tonne G.L.V.W  
**PS2504** - F.A.C.T.A Class B 44 tonne G.L.V.W  
**PS2507** - F.A.C.T.A Class FL Forklift Loading  
G.L.V.W = Gross Laden Vehicle Weight

### Standard Sizes: (clear opening)

Suffix = A = 300 x 300mm    Suffix = E = 750 x 600mm  
Suffix = B = 450 x 450mm    Suffix = F = 750 x 750mm  
Suffix = C = 600 x 450mm    Suffix = G = 900 x 600mm  
Suffix = D = 600 x 600mm    Suffix = J = 900 x 900mm

Non standard sizes available

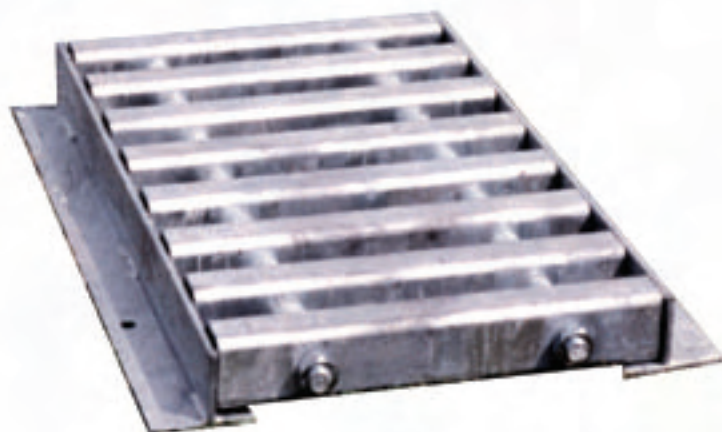

# 2550 series - duct system

## PETER SAVAGE 2550 SERIES

Fabricated steel rolled hollow section drainage ducting system

### Product & load rating:

**PS2550** - F.A.C.T.A Class A Pedestrian Duty  
**PS2551** - F.A.C.T.A Class AA 5 tonne G.L.V.W  
**PS2552** - F.A.C.T.A Class AAA 10 tonne G.L.V.W  
**PS2554** - F.A.C.T.A Class B 44 tonne G.L.V.W  
**PS2557** - F.A.C.T.A Class FL Forklift Loading  
G.L.V.W = Gross Laden Vehicle Weight

### Standard Sizes: (clear opening)

Suffix = A = 300mm    Suffix = F = 750mm  
Suffix = B = 450mm    Suffix = J = 900mm  
Suffix = D = 600mm    Suffix = X = Non Standard  
Length of unit to suit site layout.



### 2500 / 2550 series features:

- Substantial rolled hollow section load bearing bars • Threaded transverse bar complete with spacer bosses •
- Matching frame section with fixing lugs • High strength to weight ratio enabling easy removal for drain maintenance •
- Manufactured under an ISO 9001:2000 Quality System •


**Finish:** Hot dipped galvanised to BS EN ISO 1461 as standard.

**Optional Extras:** Locking screws - standard, allen key head or M.O.D approved security screws. Fishtail lugs (in lieu of fixing lugs). Long life plus galvanising. All stainless steel assembly - grade 304 or 316.

### Specification / Ordering:

Please choose the required product type code, and size reference suffix (& unit length for duct system), stating any optional extras  
i.e. PS2554J, 1000mm long standard locking.

Frame depth (X) is dependant on cover size and loading, please contact sales office for details.

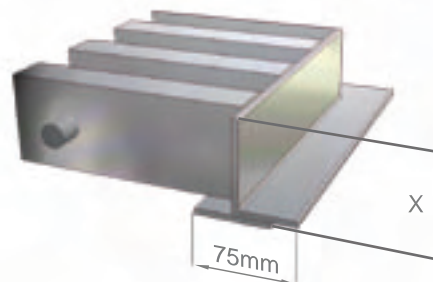

**Nuneaton** TEL : +44 (0) 24 7664 1777 FAX : +44 (0) 24 7637 5250 EMAIL : sales@peter-savage.co.uk

**Wakefield** TEL : +44 (0) 1924 258 381 FAX : +44 (0) 1924 258 382 EMAIL : wakefield@peter-savage.co.uk