

# 6000 series - single unit

## PETER SAVAGE 6000 SERIES

Recessed Block Pavior Infill Access Cover & Frame


### Product loading codes:

PS6001 – F.A.C.T.A Class AA 5 tonne G.L.V.W  
PS6002 – F.A.C.T.A Class AAA 10 tonne G.L.V.W  
PS6004 – F.A.C.T.A Class B 44 tonne G.L.V.W  
PS6007 – F.A.C.T.A Class FL Forklift Loading

G.L.V.W = Gross Laden Vehicle Weight

### Standard Sizes: (Clear opening)

Suffix = A = 300 x 300mm      Suffix = E = 750 x 600mm  
Suffix = B = 450 x 450mm      Suffix = F = 750 x 750mm  
Suffix = C = 600 x 450mm      Suffix = G = 900 x 600mm  
Suffix = D = 600 x 600mm  
Non-standard sizes available

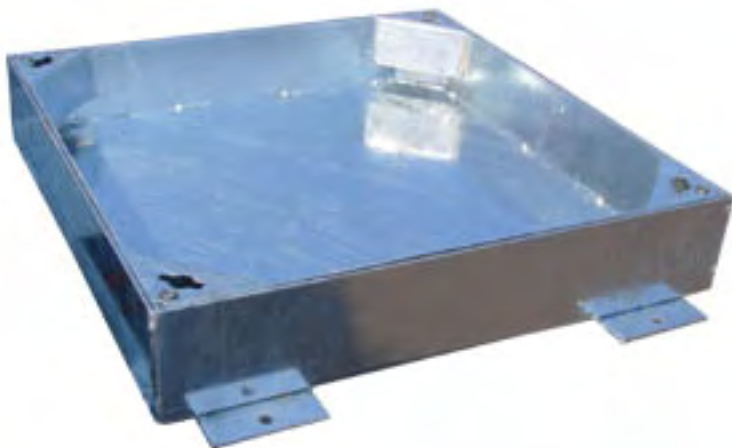

PETER SAVAGE LIMITED

# 6700 series - twin unit

## PETER SAVAGE 6700 SERIES

Twin Recessed Block Pavior Infill Access Cover & Frame


### Product loading codes:

PS6701 – F.A.C.T.A Class AA 5 tonne G.L.V.W  
PS6702 – F.A.C.T.A Class AAA 10 tonne G.L.V.W  
PS6704 – F.A.C.T.A Class B 44 tonne G.L.V.W  
PS6707 – F.A.C.T.A Class FL Forklift Loading

G.L.V.W = Gross Laden Vehicle Weight

### Standard Sizes: (Clear opening)

Suffix = G = 900 x 600mm      Suffix = M = 1200 x 750mm  
Suffix = H = 900 x 750mm      Suffix = N = 1200 x 900mm  
Suffix = J = 900 x 900mm      Suffix = P = 1500 x 600mm  
Suffix = K = 1000 x 1000mm      Suffix = Q = 1500 x 750mm  
Suffix = L = 1200 x 600mm      Non-standard sizes available

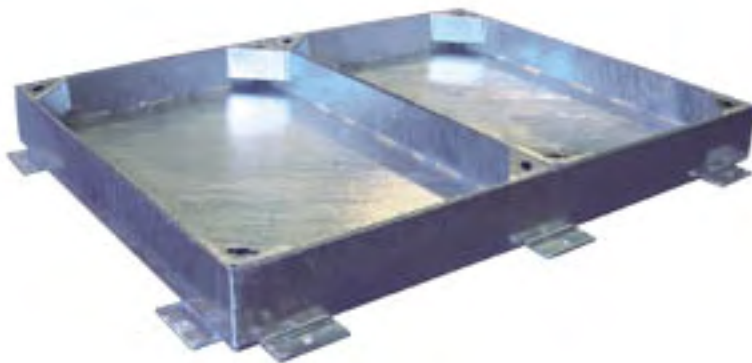

### 6000 / 6700 series features:

- Recessed lid to enable block / slab infill
- Angled inner lid to aid lid removal
- Robust lifting eyes, pierced to accept standard profile lifting keys
- Manufactured from a specially produced 4mm thick rolled frame section
- Manufactured under an ISO 9001:2000 Quality System
- **Finish:** Hot dipped galvanised to BS EN ISO 1461 as standard

### Internal depth options:


Block size	Lid recess	Frame depth	Code
up to 50mm	70mm	135mm	7
up to 65mm	90mm	135mm	9
up to 80mm	100mm	135mm	1
up to 100mm	130mm	155mm	3

**Optional Extras:** Single or Double seal. Brass or stainless steel edging trim to top surface, Locking with M.O.D. approved security screws, Locking with high security screws, Neoprene seal, Badging i.e. GAS / WATER etc.


### Specification / Ordering:

Please choose the required load rating code, size and lid recess suffix stating any optional extras ie. PS6004C7, locking 4 screws.

Single Seal  
Frame Detail

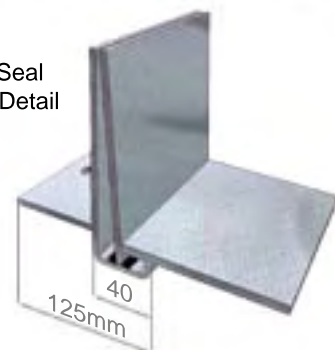

Double Seal  
Frame Detail



Nuneaton TEL : +44 (0) 24 7664 1777 FAX : +44 (0) 24 7637 5250 EMAIL : sales@peter-savage.co.uk

Wakefield TEL : +44 (0) 1924 258 381 FAX : +44 (0) 1924 258 382 EMAIL : wakefield@peter-savage.co.uk