

100 series - single unit

PETER SAVAGE 100 SERIES

38mm Deep Standard Solid Top Access Cover & Frame

Product loading codes :

PS101 – F.A.C.T.A Class AA 5 tonne G.L.V.W
PS102 – F.A.C.T.A Class AAA 10 tonne G.L.V.W
PS104 – F.A.C.T.A Class B 44 tonne G.L.V.W

G.L.V.W = Gross Laden Vehicle Weight

Standard Sizes: (clear opening)

Suffix = A = 300 x 300mm	Suffix = F = 750 x 750mm
Suffix = B = 450 x 450mm	Suffix = G = 900 x 600mm
Suffix = C = 600 x 450mm	Suffix = H = 900 x 750mm
Suffix = D = 600 x 600mm	Suffix = J = 900 x 900mm
Suffix = E = 750 x 600mm	Suffix = K = 1000 x 1000mm

Non-standard sizes available



PETER SAVAGE LIMITED

400 series - twin unit

PETER SAVAGE 400 SERIES

43mm Deep Twin Solid Top Access Cover & Frame


Product loading codes :

PS401 – F.A.C.T.A Class AA 5 tonne G.L.V.W
PS402 – F.A.C.T.A Class AAA 10 tonne G.L.V.W
PS404 – F.A.C.T.A Class B 44 tonne G.L.V.W

G.L.V.W = Gross Laden Vehicle Weight

Standard Sizes: (clear opening)

Suffix = L = 1200 x 600mm	Suffix = R = 1500 x 900mm
Suffix = M = 1200 x 750mm	Suffix = T = 1800 x 600mm
Suffix = N = 1200 x 900mm	Suffix = V = 1800 x 750mm
Suffix = P = 1500 x 600mm	Suffix = W = 1800 x 900mm
Suffix = Q = 1500 x 750mm	Non-standard sizes available

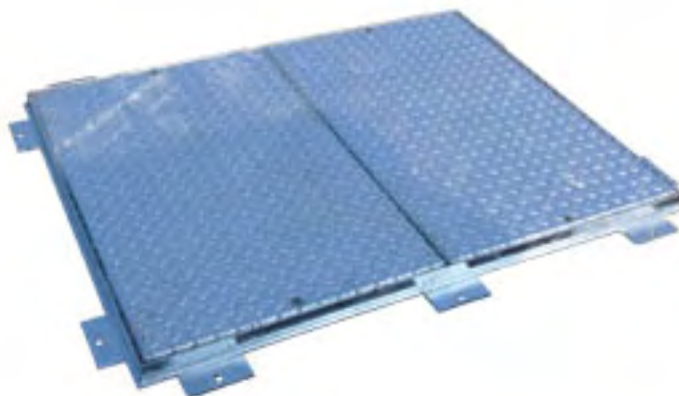


100 / 400 series features:

- Chequer plate solid top lids • Underbraced where required to meet stated load ratings •
- Supplied single seal as standard • Available as double seal •
- 400 series twin units have a centre removable beam and frame fixing points •
- Manufactured under an ISO 9001:2000 Quality System •
- **Finish:** Hot dipped galvanised to BS EN ISO 1461 as standard •


Optional Extras: Double seal. Locking 2 or 4 stainless screws. Locking with M.O.D. approved security screws, Locking with high security screws, Lock and lift devices, Neoprene seal, Peephole inspection point. Flush fitting engraved plate indicating which service i.e. Water, Gas, and Electricity etc.

Specification / Ordering:

Please choose the required load rating code and size reference suffix, stating any optional extras i.e. PS104F Double seal, locking 4 screws.

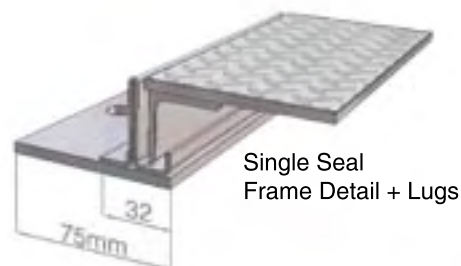

Single Seal
Frame Detail + Lugs

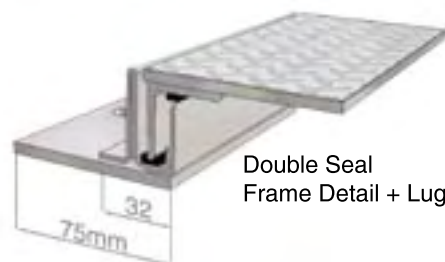

Double Seal
Frame Detail + Lugs

Nuneaton TEL : +44 (0) 24 7664 1777 FAX : +44 (0) 24 7637 5250 EMAIL : sales@peter-savage.co.uk

Wakefield TEL : +44 (0) 1924 258 381 FAX : +44 (0) 1924 258 382 EMAIL : wakefield@peter-savage.co.uk