

300 series - single unit

PETER SAVAGE 300 SERIES

43mm Deep Hinged & Locking Access Cover & Frame

Product loading codes:


PS301 – F.A.C.T.A Class AA 5 tonne G.L.V.W
PS302 – F.A.C.T.A Class AAA 10 tonne G.L.V.W
PS304 – F.A.C.T.A Class B 44 tonne G.L.V.W
PS307 – F.A.C.T.A Class FL Forklift Loading

G.L.V.W = Gross Laden Vehicle Weight

Standard Sizes: (clear opening)

| | |
|--------------------------|----------------------------|
| Suffix = A = 300 x 300mm | Suffix = F = 750 x 750mm |
| Suffix = B = 450 x 450mm | Suffix = G = 900 x 600mm |
| Suffix = C = 600 x 450mm | Suffix = H = 900 x 750mm |
| Suffix = D = 600 x 600mm | Suffix = J = 900 x 900mm |
| Suffix = E = 750 x 600mm | Suffix = K = 1000 x 1000mm |

Non-standard sizes available

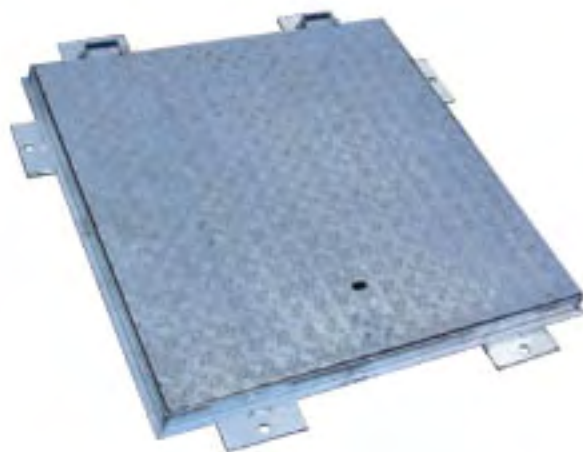

500 series - twin unit

PETER SAVAGE 500 SERIES

43mm Deep Hinged & Locking Access Cover & Frame

Product loading codes:

PS501 – F.A.C.T.A Class AA 5 tonne G.L.V.W
PS502 – F.A.C.T.A Class AAA 10 tonne G.L.V.W
PS504 – F.A.C.T.A Class B 44 tonne G.L.V.W
PS507 – F.A.C.T.A Class FL Forklift Loading

G.L.V.W = Gross Laden Vehicle Weight

Standard Sizes: (clear opening)

| | |
|---------------------------|------------------------------|
| Suffix = L = 1200 x 600mm | Suffix = R = 1500 x 900mm |
| Suffix = M = 1200 x 750mm | Suffix = T = 1800 x 600mm |
| Suffix = N = 1200 x 900mm | Suffix = V = 1800 x 750mm |
| Suffix = P = 1500 x 600mm | Suffix = W = 1800 x 900mm |
| Suffix = Q = 1500 x 750mm | Non-standard sizes available |




300 / 500 series features

- Chequer plate solid top lids • Underbraced where required to meet stated load ratings •
- Hinged lids complete with 'Lock & Lift' locking device •
- Available as double seal • Supplied single seal as standard •
- Twin units have a removable centre beam •
- Manufactured under an ISO 9001:2000 Quality System •
- For Kitemarked version see KS20 series in section F •
- **Finish:** Hot dipped galvanised to BS EN ISO 1461 as standard •

Optional Extras: Double seal, Locking with M.O.D. approved security screws, Locking with high security screws, Neoprene seal, Peephole inspection point. Flush fitting engraved plate indicating which service i.e. Water, Gas, and Electricity etc.


Specification / Ordering:

Please choose the required load rating code and size reference suffix, stating any optional extras i.e. PS507W Badged Cables.

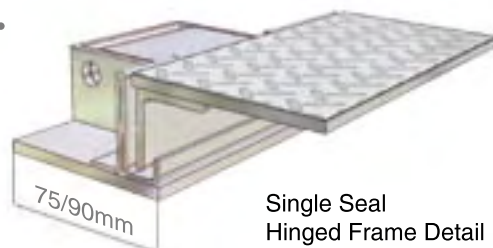

Single Seal
Hinged Frame Detail

90mm
on hinge
face only

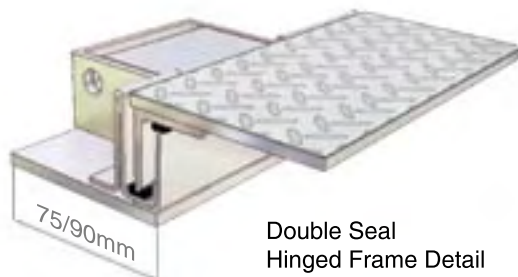

Double Seal
Hinged Frame Detail